


Typical Features

- ◆ Fixed input voltage, Isolated & unregulated output, Output power 1W
- ◆ High Efficiency up to 83%
- ◆ Small compact SIP packing
- ◆ Isolation Voltage 4200VAC/ 6000VDC
- ◆ Operating Temperature: -40℃ ~ +85℃
- ◆ Plastic Case, meet UL94 V-0 standard

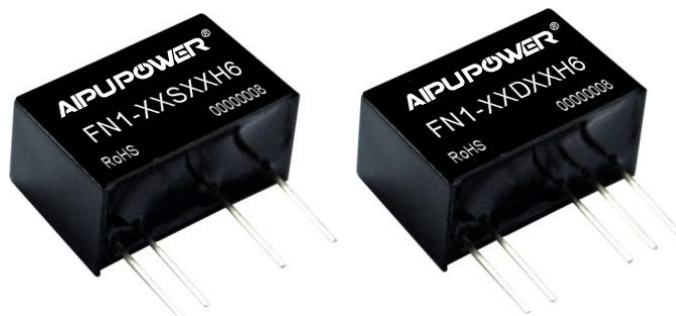

Test Condition: Unless otherwise specified, data in the datasheet should be tested under the conditions of inputting nominal voltage, pure resistance rated load and Ta=25℃

Application Field

It could be widely used for instrument, communication, pure digital circuit, general low frequency analog circuit, relay drive circuit, data exchange circuit, etc.

Typical Product List

Model	Input Voltage Range (VDC)		Output Voltage/Current (Vo/Io)		Input Current(mA) Nominal Voltage		Max. Capacitive Load	Ripple & Noise (Max.)	Efficiency (%)full load, input nominal voltage	
	Nominal	Range	Voltage (VDC)	Current(mA) MAX./Min.	Full load Typ.	No Load Typ.	uF	mVp-p	Min.	Typ.
FN1-05S3V3H6	5	4.5 - 5.5	3.3	303	250	20	1000	120	69	71
FN1-05S05H6			5	200	243	20	1000	120	78	80
FN1-05S09H6			9	111	240	25	680	120	81	83
FN1-05S12H6			12	83	278	40	470	120	72	74
FN1-05S15H6			15	67	270	40	470	120	72	74
FN1-05S24H6			24	42	227	23	470	120	78	80
FN1-12S05H6	12	10.8 - 13.2	5	200	101	10	1000	120	73	75
FN1-12S09H6			9	111	100	10	680	120	80	82
FN1-12S12H6			12	83	100	13	680	120	81	83
FN1-12S15H6			15	67	100	10	470	120	81	83
FN1-24S3V3H6	24	21.6 - 26.4	3.3	303	52	7	1000	120	77	79
FN1-24S05H6			5	200	52	7	1000	120	78	80
FN1-24S09H6			9	111	50	10	680	120	80	82
FN1-24S12H6			12	83	57	10	470	120	74	76
FN1-24S15H6			15	67	56	10	470	120	74	76
FN1-24S24H6			24	42	52	10	220	120	76	78

FN1-05D05H6	5	4.5 - 5.5	±5	±100	290	40	470	120	74	76
FN1-05D09H6			±9	±56	286	40	470	120	76	78
FN1-05D12H6			±12	±42	236	25	470	120	80	82
FN1-05D15H6			±15	±33	278	40	220	120	72	74
FN1-12D05H6	12	10.8 - 13.2	±5	±100	100	10	1000	120	81	83
FN1-12D09H6			±9	±56	119	20	470	120	76	78
FN1-12D12H6			±12	±42	119	20	220	120	69	71
FN1-12D15H6			±15	±33	116	20	220	120	71	73
FN1-24D05H6	24	21.6 - 26.4	±5	±100	60	10	470	120	71	73
FN1-24D09H6			±9	±56	60	10	470	120	75	77
FN1-24D12H6			±12	±42	59	10	220	120	72	74
FN1-24D15H6			±15	±33	49	80	220	120	82	84

Note:

1. “*” are models under developing.
2. In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 10% rated load when it is used. If the needed power is indeed small, please parallel a resistor at the output side, the resistance recommended equal to 10% nominal power.
3. The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Test Condition	Min.	Typ.	Max.	Unit
Input Overshoot Voltage (1Second.max.)	5Vdc Input	-0.7	--	9	VDC
	12Vdc Input	-0.7	--	18	
	15Vdc Input	-0.7	--	21	
	24Vdc Input	-0.7	--	30	
Input Filter	Capacitor Filter				

Output Specifications




ITEM	Working Conditions	Min.	Typ.	Max.	Unit
Output Power		0.1	--	1	W
Output Voltage Accuracy	Nominal input, Full load	--	±2	±5	%
Load Regulation	10% ~ 100% nominal load	--	--	15	
Line Voltage Regulation	Input Voltage Change±1%	--	--	±1.2	
Ripple & Noise①	Nominal input,full load, 20MHZ bandwidth	--	100	120	mVp-p
Temperature Drift Coefficient	100% Full Load	--	--	±0.03	%/°C
Output Short Circuit Protection②	Continuous short-circuit protection, self-recovery				

NOTE:①Ripple & Noise tested by twisted-pair method;

General Specifications

Switching Frequency	Typical	260KHz (Typ.)
Operating Temperature	Refer to Temperature Derating Curve	-40℃ ~ +85℃
Storage Temperature		-55℃ ~ +125℃
Shell temperature rise during work	Within Temperature Derating Curve	25℃(Typ.)
Relative Humidity	No condensing	5%~95%
Case Material		Black flame-retardant heat-resistant Plastic(UL94 V-0)
Pin Withstand Soldering Temp	Distance to Case 1.5mm, 10S	300℃ MAX
Isolation Voltage	Test 1 minute, leakage current < 0.5mA	4200VAC/ 6000Vdc
Isolation Capacitor	Input/Output, 100KHz/0.1V	20 pF (Typ.)
MTBF	MIL-HDBK-217F@25℃	35X10 ⁵ Hrs
Product Weight		3.7g (Typ.)
Packing	Tube(225*20.5*12.5mm)	10PCS
	Box(245*155*85mm)	480PCS(Total 48Tubes)

Packing Dimension

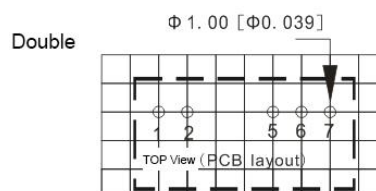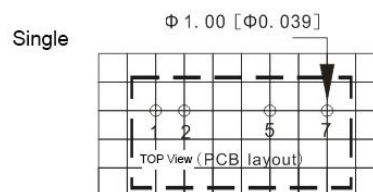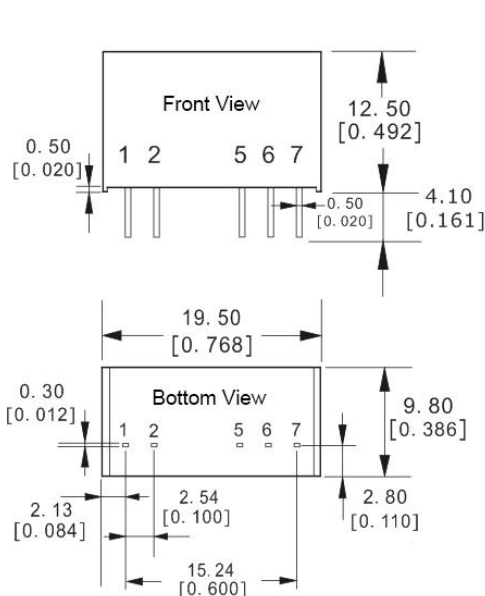

Note:
Grid: 2.54*2.54mm
Unit: mm [inch]
Pin tolerance: ±0.10[±0.004]
General tolerance: ±0.50[±0.020]

Packing Code	L x W x H	
H	19.50 × 9.80 × 12.50mm	0.768 × 0.386 × 0.492inch

Pin Function



Pin Function	1	2	3, 4	5	6	7
Single(S)	+Vin	GND	NP	-Vo	NP	+Vo
Dual(D)	+Vin	GND	NP	-Vo	COM	+Vo

Note: if the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

Ripple & Noise Test: (Twisted Pair Method 20MHz bandwidth)**Test Method:**

a. 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.


b. Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

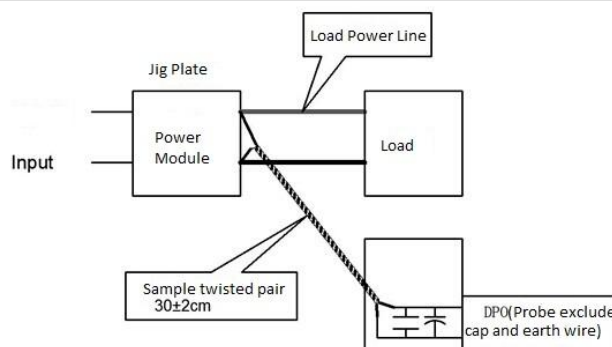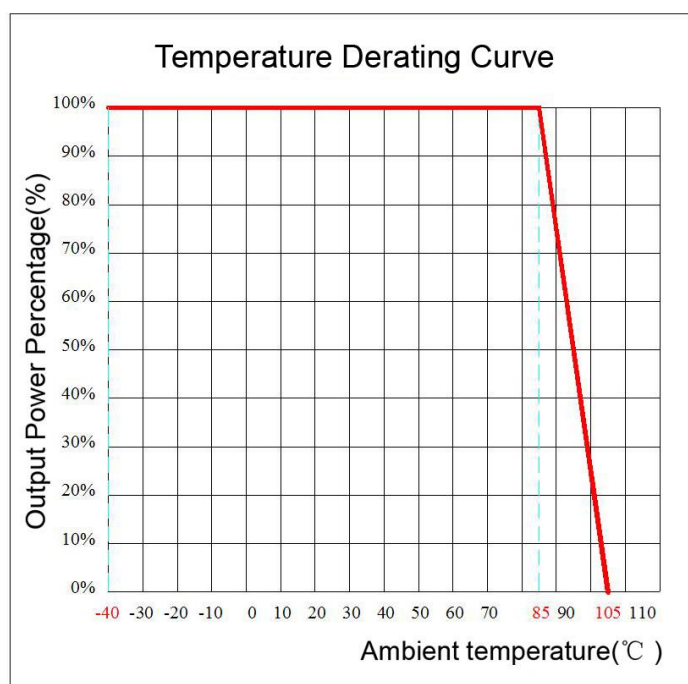**Temperature Curve****Design and Application Circuit Recommended****① Output load requirements**

- a. In order to ensure that the power module can work efficiently and reliably, it is recommended that its minimum load should not be less than 10% of the rated resistive load; if the power you need is indeed small, please connect a resistor equivalent to 10% of the rated load in parallel at the output end.
- b. The maximum capacitive load of the product is obtained from the nominal full load test. When in use, it cannot exceed the maximum capacitive load at the output end, otherwise it is likely to cause startup difficulties and damage the product.

② Recommended circuit

- a. In order to ensure effective reduction of input and output ripple and noise, a capacitor filter network can be connected to the input and output ends. The application circuit is shown in Figure 1 below; but a suitable filter capacitor should be selected. If the capacitor is too large, it may affect the startup of the product. To ensure that each output works under safe and reliable conditions, the recommended capacitive load value is detailed in Table 1 below. (However, for application circuits with actual output power less than 0.5W, it is recommended not to connect an external capacitor)

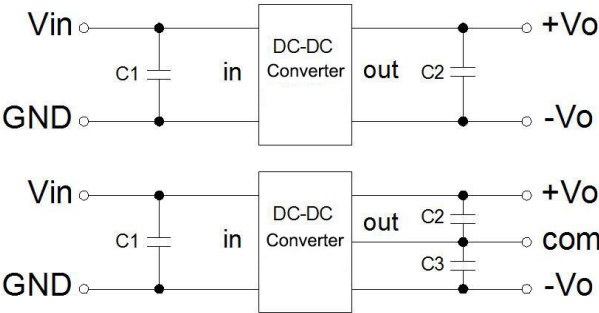


Recommended capacitive load value(Table 1)

Vin (Vdc)	C1 (μ F)	Vout (Vdc)	C2 (μ F)	Vout (Vdc)	C2,C3 (μ F)
3.3/5	4.7	3.3/5	10	$\pm 3.3/\pm 5$	4.7
12	2.2	9	4.7	± 9	2.2
15	1	12	2.2	± 12	1
24	1	15	1	± 15	0.47
--	--	24	0.47	± 24	0.22

③ Output voltage regulation and overvoltage protection circuit

The simplest device for output voltage regulation, overvoltage and overcurrent protection is to connect a linear voltage regulator with overheat protection in series at its input or output end and connect a capacitor filter network (see the figure below). The recommended value of the filter capacitor is detailed in (Table 1). The linear voltage regulator should be reasonably selected according to the voltage and current required for actual work; or our NW series products can be selected.

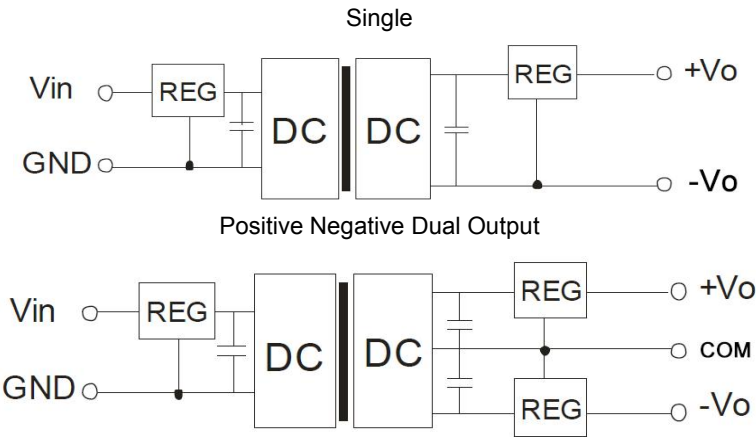

Note:

- 1.This product cannot be used in parallel, and do not support hot-plugging;
- 2.If the product works below the minimum required load, it cannot guarantee that the product performance meets all performance indicators in this manual;
3. All index testing methods in this datasheet are based on our Company's corporate standards
4. The product specification may be changed at any time without prior notice.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.
Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821
E-mail: sales@aipu-elec.com Website: <https://www.aipupower.com>