



Typical Features

- Wide input voltage range 60-600VDC
- No load Power Consumption ≤0.6W
- Efficiency 84% (typ.)
- Over-voltage, over-current, short circuit protections
- Isolation voltage:4000Vac
- Compliant with IEC/EN61000
- Conform to RoHS regulation
- Plastic case enclosed, flame class UL94- V0
- PCB mounting



Application Field

DD60-300S12G2N6 is a compact size, high efficiency DC/DC Converter provided by Aipu. It has the advantages of wide input voltage range, low ripple, low temperature rise, low standby power consumption, high efficiency, high reliability, safety isolated and good EMC performance. It can be widely used in Solar power generation and home appliance energy storage and other fields. Additional circuit for EMC is recommended in this data sheet for the application with higher EMC requirement.

Typical Pr	Typical Product List											
Certificate		Ou	tput Specificat	tion	Max.	Ripple &	Efficiency					
	Part No	Power Voltage Current		Capacitive Load	Noise 20MHz (MAX)	@full load 300VDC(Typ.)						
		040		1 (1)		,	(21 /					
		(W)	Vo(V)	lo(mA)	uF	mVp-p	%					
_	DD60-300S12G2N6	60	12	5000	5400	200	84					

Note 1: The typical value of efficiency is based on the product tested after half an hour burn-in at full load.

Note 2: The full load efficiency should be in ±2% of the typical value in this table. The efficiency is calculated by the way that the full output power is divided by the input power.

Note 3: The ripple and noise are tested by the twisted pair method according to the Ripple & Noise Test Instructions in the manual.

Input Specifications									
Items	Operating Conditions	Min.	Тур.	Max.	Unit				
Input Voltage Range	DC Input	60	300	600	VDC				
lanut Cumant	60VDC@70% load	-	- 1.0						
Input Current	600VDC@100% load	-	-	0.3	A				
Surge Current	600VDC	-	80	-					
No Lood Down Consumention	Input 60VDC	-	-		10/				
No Load Power Consumption	Input 600VDC	-	-	0.6	W				
External fuse recommended	-	15A/1000VDC Time-delay fuse, necessary							
Hot plug	-	N/A							
Remote control	-	N/A							






	Itara		Om a mat!	a Conditions	Min	т.,	Max	11=:4		
	Item			g Conditions	Min.	Ty.	Max.	Unit		
	ige Accı			oltage, any load	-	±2.0	-			
Line Regulation				ed load	-	±1.0	-	%		
Load Regulation			Rated input volta	ge, 20%~100% load	-	±1.0	-			
Min	imum L	oad	Sing	le output	0	-	-	%		
Turn-	on dela	y time	Input 300\	/DC (full load)	-	2000	-	mS		
Power-	off hold	up time	Input 600\	/DC (full load)	3	-	-	mS		
Dynamic	Over	shoot range	25%~	50%~25%	-5.0	-	+5.0	%		
Response			50%~	75%~50%	-5.0	-	+5.0	mS		
Output Overshoot		Full input	voltago rango		≤10%Vo		%			
Short C	ircuit Pr	otection	Full Input	voltage range	continu	uous, self-reco	very	Hiccup		
Drift	t Coeffic	cient		-	-	±0.02	-	%/°C		
Over Cu	ırrent Pı	otection	Full input	voltage range	≥1109	≥110% Io, self-recovery				
Over Vo	Itage Pi	otection		-			≤25			
General S	pecific	cations								
Item		Operatin	g Conditions	Min.	Ty.	Max.	Unit			
Switching Frequency			-	-	65	-	KHz			
Operating Temperature		Please refer to the te	Please refer to the temperature derating curve			+40	°C			
Storage Temperature			-40	-	+85					
Caldavia	. T		Wave	Wave soldering			260±5℃, time 5-10S			
Soldering	rempe	rature	Manua	Manual soldering			380±10℃, time 4-7S			
Relativ	e Humi	dity		-	-	-	95	%RH		
Isolation Vo	Itage	I/P-O/P	Test 1min, leak	age current≲5mA	4000	-	-	VAC		
EMC	Standa	rd		-	IEC/EN61000, 55032					
Vil	oration			-			10-55Hz,10G,30 Min, along X,Y,Z			
Safe	ty Clas	s		-	CLASS II					
Case f	lame cla	ass		-	UL94 V-0					
N	//TBF		MIL-HDE	sK-217F 25℃	>100,000H					
Physical (Charac	teristics								
	C	Case Materi	al	Pla	astic in Black, f	lame class UL	94V-0			
Dime	nsion		I I a dia anti-	126.5X76.0X40.5 mm						
Product Weight			Horizontal	550g (TYP)						
Product	Cooling Method				000;) (' ' ')				








EMC Performances										
Total-item		Sub-item	Standard	Class						
		CE	CISPR22/EN55032	Class A						
	EMI	CE	CISPR22/EN99032	Class B (with the Recommended circuit 2)						
	EIVII	RE	CISPR22/EN55032	Class A						
		NE NE	CISF N22/EN33032	Class B (with the Recommended circuit 2)						
		RS IEC/EN61000-4-3 10V/m perf.Criteria A (with the Recommended circ								
EMC		CS IEC/EN61000-4-6 10Vr.m.s perf.Criteria A (with the Re		10Vr.m.s perf.Criteria A (with the Recommended circuit 2)						
	EMS	ESD	IEC/EN61000-4-2	Contact ±6KV/ Air ±8KV Perf.Criteria B (with the Recommended circuit 2)						
		Surge	IEC/EN61000-4-5	Line to line ±2KV Perf.Criteria B (with the Recommended circuit 2)						
		EFT	IEC/EN61000-4-4	±4KV Perf.Criteria B (with the Recommended circuit 2)						
		PFMF	IEC/EN61000-4-8	10A/m Perf.Criteria A (with the Recommended circuit 2)						

Packaging Dimensions

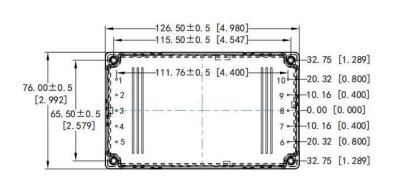







Unit: mm[inch]

General tolerance: ±0.5[±0.020]


Packagir	ng Code		LxWxH								
G			126.5X76.0X40.5 mm				4.980X2.992X1.594 inch				
Pin Definition											
Pin No.	1	2	3	4	5	6	7	8	9	10	
Single(S)	+Vin	NP	NP	NP	-Vin	+Vo	-Vo	NP	NP	NC	
Function	Input V+	No pin	No pin	No pin	Input V-	Output V+	Output V-	No pin	No pin	No connection	






Ripple & Noise Test Instruction (Twisted Pair Method, 20MHz bandwidth)

- 1) Ripple noise test need 12# twisted pair cables, an oscilloscope which bandwidth should be set to 20MHz, 0.1uF polypropylene capacitor and 10uF high-frequency low-resistance electrolytic capacitor are connected in parallel with the probes (100M bandwidth). The oscilloscope should be set on the Sample Mode.
- 2) The output ripple noise test diagram is shown on the right. The converter output connects to the electronic load by the jig with cables which size should be defined according to the output current value. The twisted pair (length 30cm±2 cm) should be connected in parallel with the load, the location is as close as possible to the output pins or terminals. The test can be started after input power on.



Product performance curve

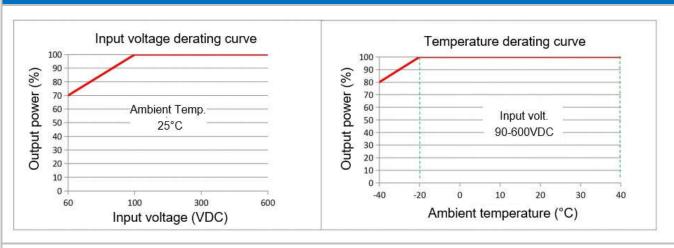


Note 1: The output power should be derated based on the input voltage derating curve at 60~100VDC.

Note 2: This product should operate at a natural air condition, please contact us if it need be used at a closed space.

Recommended Circuits for Application

1. Typical Application Circuit

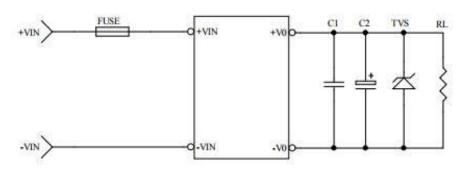


Circuit 1

Part No.	FUSE	C1	C2	TVS
DD60-300S12G2N6	15A/1000VDC, Time-delay fuse, necessary	1206/1uF/50V	220uF/25V	SMBJ15A





2. Recommended EMC circuits

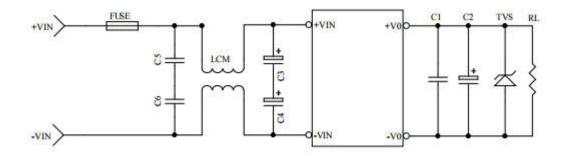

Circuit 2

Part No.	FUSE	C5, C6	C3, C4	LCM	C1	C2	TVS
DD60-300S12G2N6	15A/1000VDC,	X2/104K/	10uF/	TD1212-15mH/	1206/1uF/50V	220uF/25V	SMBJ15A
	time-delay	275VAC	450VDC	1-1.5A(Flat wire			
				choke)			

Application Notice:

- 1. The products should be used according to the specifications in this manual, otherwise it could be permanently damaged.
- 2. A fuse should be used at input.
- 3. The product performances in this manual cannot be guaranteed if it works at a lower load than the minimum load defined.
- 4. The product performances in this manual cannot be guaranteed if it works at over-load condition.
- 5. Unless otherwise specified, all values or indicators in this manual are tested at Ta=25°C, humidity<75%RH, rated input voltage and rated load (pure resistance load).
- 6. All values or indicators in this manual had been tested based on Aipupower test specifications.
- 7. The specifications are specially for the parts listed in this manual, any other non-standard model performances could be out of the specifications. Please contact our technician for specific requirement.
- 8. Aipupower can provide customization service.

Guangzhou Aipu Electron Technology Co., Ltd

Address: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, China.

Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-889-8821 E-mail: sales@aipu-elec.com Website: https://www.aipupower.com